


## Performance Estimation Data

The test results are just for reference. There could be tolerance of 3~5% depending on measurement conditions.  
 Measurement reference (1/4 inch clear glass) : UVR(300-380nm), IRR(780-2500nm), TSER(300-2500nm).

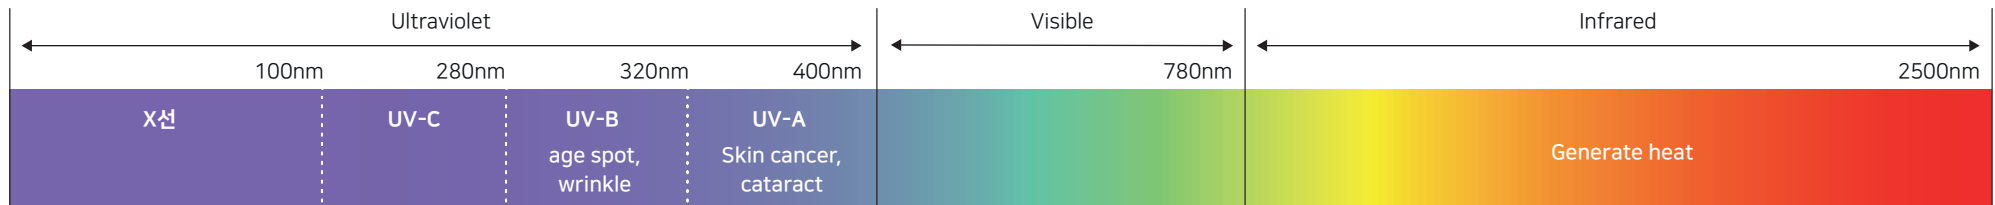

Model		Ultraviolet			Visible		Rejection		Thickness
		UVR(%)	SPF (UV-B)	PA (UV-A)	VLT(%)	VLR(%)	IRR(%)	TSER(%)	mil/ply
CERAMIC XT	70	99.9	SPF 285	PA +++	73	8	89	63	2.0/2
	80				77	8	76	51	2.0/2
CERAMIC SP	10	99.9	SPF 285	PA +++	10	7	81	76	2.0/2
	20				23	7	81	74	2.0/2
	35				34	7	80	73	2.0/2
	50				51	8	79	65	2.0/2
CERAMIC ST	5	99.9	SPF 285	PA +++	5	6	66	70	1.5/2
	15				11	6	65	69	1.5/2
	20				19	6	65	69	1.5/2
	25				25	6	65	69	1.5/2
	35				33	6	64	67	1.5/2
	85				82	9	49	33	1.5/2
METAL RN	5	99.9	SPF 285	PA +++	6	10	96	86	2.0/2
	10				12	11	95	85	2.0/2
	30				30	13	96	76	2.0/2
	50				48	14	92	71	2.0/2
PEARL SILVER	5	99.9	SPF 285	PA +++	5	7	88	70	1.5/2
	10				11	7	87	69	1.5/2
	15				14	7	50	55	1.5/2
IRIDESCENT BV	30	99.9	SPF 285	PA +++	27	9	90	73	2.0/2